



WWW.NANLUX.COM

NANLUX

INNOVATE · ILLUMINATE

Guangdong Nanguang Photo&Video Systems Co., Ltd.

PHOTOQUIP[®] INDIA LTD.

Brand Concept

Dedicated to creating more high-quality products that are more professional, simpler and faster setup for movie, TV, broadcast and media applications.

The rising expectations in modern professional lighting systems are seeking new levels of control, precision and customization. From compatibility in wireless protocols to ever expanding flexibility to help achieve new levels of creativity.

The evolution of 21st century productions have inspired products and methods to provide convenience and time saved on set - simpler and faster setup, intelligentization for storing repeatable scene settings for later use.

NANLUX, as a professional lighting brand, through its parent company – NANGUANG, listens to the needs from our active and creative customers to help push the envelope of what is possible. With our nearly 32 years of experience, we have the expertise to make professional clients' requests a reality through our product lines.

The future is unknown, but Nanlux will be there on the cutting edge of what is possible!



© Ildar Nizametdinov




CONTENTS

- 01-12 Evoke Series LED Spot Light
- 13-17 Dyno Series LED RGBWW Soft Panel Light
- 18-22 TK Series LED Soft Panel Light

Evolve Series LED Spot Light

A New Breakthrough




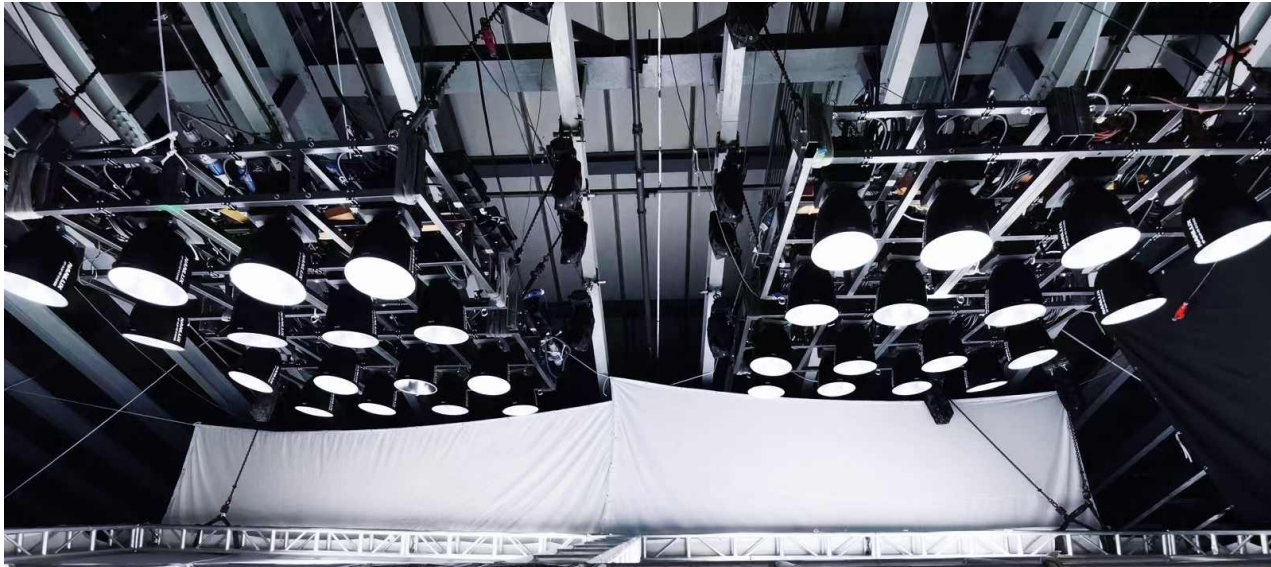

© Tom Van den Abbeele © Xavier Dolleans

Evoke 900C Full color

- 1. RGLBAC Color Mixing System** Full color LED spotlight equipped with RGLBAC six-color mixing system
- 2. Ultra-high Brightness Output** Staggering luminance of 12,940 lux at 3m (at 5600K, with 45° reflector), with a rated output of 940W
- 3. Ultra-wide CCT Range** 1800K-20000K with G/M±200 adjustment
- 4. More Color Modes** Advanced HSI, RGBW, XY Coordinate and GEL mode
- 5. IP55 Weather Resistant** Sturdy build quality with both fixture and power supply IP55 rated
- 6. Fully Dimmable Lighting** From 0-100% in ultra-precise 0.1% increment
- 7. Comprehensive Wired and Wireless Control Methods** On-board, Remote Controller, NANLINK APP, Wire Controller, DMX/RDM, LumenRadio CRMX, Art-Net/sACN
- 8. Built-in 15 Customizable Practical Effects**



Includes

Evoke 900C × 1, Yoke × 1, Power Supply × 1, Reflector × 1, DC Connection Cable 7.5M × 1, AC Power Cable 6M × 1, USB Flash Drive × 1, AS-CP-QR-EV Quick Release Clamp × 1, WS-RC-C2 Remote Controller × 1, User Manual × 1, CC-ST-EV900C Trolley Case × 1



Evoked Technical Data

Model	Evoked 900C
Rated Power	940W
Input Voltage/Current	DC 48V/18.75A Max, AC 100-240V 50/60Hz
CCT	1800K-20000K (G/M±200)
CRI / TLCI	Average 96
TM-30	Rf: Average 94 / Rg: Average 100
Dimming	0-100%, stepless 0.1% from 0-100%
IP Rating	IP55
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM, LumenRadio CRMX, Art-Net/sACN, Wire Controller (reserved)
Product Size	Light Fixture (without COB protective cap): 330 × 241 × 210mm / 13.0 × 9.5 × 8.3" Power Supply: 146 × 125 × 344mm / 5.7 × 4.9 × 13.5"
Product Weight	Light Fixture: 7.7kg / 16.98lb Power Supply: 4.5kg / 9.92lb

Illumination (lux / fc)

CCT	Light Only					With FL-35YK 11°					With FL-35YK 45°				
	3200K	5600K	R	G	B	3200K	5600K	R	G	B	3200K	5600K	R	G	B
3M	4250 lux 395 fc	4341 lux 403 fc	800 lux 74 fc	1835 lux 170 fc	210 lux 20 fc	42540 lux 3952 fc	43270 lux 4020 fc	7920 lux 736 fc	17690 lux 1643 fc	2040 lux 190 fc	10160 lux 944 fc	10420 lux 968 fc	1788 lux 166 fc	4561 lux 424 fc	520 lux 48 fc
5M	1656 lux 154 fc	1688 lux 157 fc	300 lux 28 fc	720 lux 67 fc	83 lux 8 fc	15100 lux 1403 fc	15470 lux 1437 fc	2760 lux 256 fc	6223 lux 578 fc	710 lux 66 fc	3820 lux 355 fc	3923 lux 364 fc	681 lux 63 fc	1720 lux 160 fc	199 lux 18 fc
7M	925 lux 86 fc	945 lux 88 fc	173 lux 16 fc	398 lux 37 fc	46 lux 4 fc	7898 lux 734 fc	8056 lux 748 fc	1407 lux 131 fc	3256 lux 302 fc	360 lux 33 fc	2057 lux 191 fc	2108 lux 196 fc	352 lux 33 fc	915 lux 85 fc	102 lux 9 fc
CCT	With 26° Reflector					With 45° Reflector					With 60° Reflector				
	3200K	5600K	R	G	B	3200K	5600K	R	G	B	3200K	5600K	R	G	B
3M	39530 lux 3672 fc	40300 lux 3744 fc	7020 lux 652 fc	16580 lux 1540 fc	1860 lux 173 fc	12810 lux 1190 fc	12940 lux 1202 fc	2266 lux 211 fc	5282 lux 491 fc	530 lux 49 fc	8240 lux 765 fc	8541 lux 793 fc	1362 lux 127 fc	3528 lux 328 fc	320 lux 30 fc
5M	12300 lux 1143 fc	12560 lux 1167 fc	2317 lux 215 fc	5280 lux 491 fc	580 lux 54 fc	4404 lux 409 fc	4501 lux 418 fc	842 lux 78 fc	1854 lux 172 fc	180 lux 17 fc	3038 lux 282 fc	3110 lux 289 fc	528 lux 49 fc	1277 lux 119 fc	140 lux 13 fc
7M	6036 lux 561 fc	6176 lux 574 fc	1121 lux 104 fc	2562 lux 238 fc	260 lux 24 fc	2266 lux 211 fc	2305 lux 214 fc	402 lux 37 fc	958 lux 89 fc	102 lux 9 fc	1642 lux 153 fc	1693 lux 157 fc	309 lux 29 fc	717 lux 67 fc	72 lux 7 fc

Evoke 1200/1200B



1. Choice of models: 5600K or 3200K / 2700K-6500K
2. Revolutionary new 1.2kW LED spotlight, powerful output comparable to 1.8kW PAR or 2.5kW HMI Fresnel
3. IP54 rating weather resistance
4. Support both wired and wireless control via On-board, Remote Controller, NANLINK APP, Wire Controller, DMX/RDM, LumenRadio CRMX
5. Fully dimmable from 0-100% in ultra-precise intervals of just 0.1%
6. Multiple optional modifiers and compatible with DoPchoice
7. Built-in 11/12 customisable practical effects



Includes

Evoke 1200/1200B x 1, Yoke x 1, Power Supply x 1, Reflector x 1, DC Connection Cable 7.5M x 1, AC Power Cable 6M x 1, AS-CP-QR-EV Evoke Quick Release Clamp x 1, USB Flash Drive x 1, WS-RC-C2 Remote Controller x 1, User Manual x 1, DMX Reference Guide x 1



Evoked Technical Data


Model	<i>Evoked 1200</i>	<i>Evoked 1200B</i>
Rated Power	1200W	
Input Voltage/Current	DC 48V/25A Max, AC 100-240V 50/60Hz	
CCT	3200K / 5600K	2700K-6500K
CRI / TLCI	96 / 97	Average 96 / Average 97
TM-30	Rf: 94 / Rg: 101	Rf: Average 95 / Rg: Average 102
Dimming	0-100%, stepless 0.1% from 0-100%	
IP Rating	IP54	
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM, LumenRadio CRMX, Wire Controller (reserved)	
Product Size	Light Fixture (with Yoke): 503 × 370 × 210mm / 19.8 × 14.56 × 8.26" Power Supply: 376.5 × 181 × 246mm / 14.82 × 7.12 × 9.68"	
Product Weight	Light Fixture: 6.94kg / 15.3lb Yoke: 1.84kg / 4.05lb Power Supply: 10.5kg / 23.14lb	Light Fixture: 7.75kg / 17.09lb Yoke: 1.84kg / 4.06lb Power Supply: 10.5kg / 23.15lb

Illumination (lux / fc)

Model / CCT	<i>Evoked 1200 (5600K)</i>				<i>Evoked 1200B (3200K)</i>				<i>Evoked 1200B (5600K)</i>			
Distance	3M	5M	7M	9M	3M	5M	7M	9M	3M	5M	7M	9M
Light Only	5532 lux 514 fc	2373 lux 220 fc	1266 lux 118 fc	817 lux 76 fc	4571 lux 425 fc	1955 lux 182 fc	1088 lux 101 fc	670 lux 62 fc	5258 lux 488 fc	2244 lux 208 fc	1261 lux 117 fc	770 lux 72 fc
With 26° Reflector	58050 lux 5393 fc	18370 lux 1707 fc	9180 lux 853 fc	5649 lux 525 fc	51950 lux 4826 fc	16180 lux 1503 fc	8035 lux 746 fc	5089 lux 473 fc	61030 lux 5670 fc	18860 lux 1752 fc	9377 lux 871 fc	5882 lux 546 fc
With 45° Reflector	18460 lux 1715 fc	6583 lux 612 fc	3671 lux 341 fc	2426 lux 225 fc	15900 lux 1477 fc	5816 lux 540 fc	3320 lux 308 fc	2183 lux 203 fc	18570 lux 1725 fc	6800 lux 632 fc	3872 lux 360 fc	2547 lux 237 fc
With 60° Reflector	12460 lux 1158 fc	4645 lux 432 fc	2654 lux 247 fc	1730 lux 161 fc	10210 lux 949 fc	4117 lux 382 fc	2382 lux 221 fc	1558 lux 145 fc	12240 lux 1137 fc	4725 lux 439 fc	2800 lux 260 fc	1808 lux 168 fc
With FL-35YK 11°	65280 lux 6065 fc	22080 lux 2051 fc	11765 lux 1093 fc	7586 lux 705 fc	43480 lux 4039 fc	15610 lux 1450 fc	8056 lux 748 fc	4990 lux 464 fc	49940 lux 4639 fc	17810 lux 1655 fc	9211 lux 856 fc	5716 lux 531 fc
With FL-35YK 30°	25560 lux 2375 fc	10640 lux 988 fc	5674 lux 527 fc	3661 lux 340 fc	17290 lux 1606 fc	6721 lux 624 fc	3770 lux 350 fc	2460 lux 229 fc	19740 lux 1834 fc	7681 lux 714 fc	4316 lux 401 fc	2861 lux 266 fc
With FL-35YK 45°	15170 lux 1409 fc	5718 lux 531 fc	3065 lux 285 fc	1976 lux 184 fc	11320 lux 1052 fc	4603 lux 428 fc	2693 lux 250 fc	1777 lux 165 fc	13010 lux 1209 fc	5286 lux 491 fc	3067 lux 285 fc	2021 lux 88 fc

Evoked 2400B Bi-color

1. Ultra high luminance of 41,910 lux @3m (at 5600K, with 45° reflector) that comparable to a 10K Tungsten or 4K HMI light
2. Wide CCT range of 2700K-6500K with G/M±80 adjustment
3. Built with electronic contacts, enable modifier recognition function
4. IP55 of both fixture and power supply providing thorough protection
5. Fully dimmable from 0 to 100% with 0.1% increment
6. Adjustable cooling system includes SMART, FULL SPEED, LOW SPEED, OFF mode
7. Comprehensive wired and wireless control methods: On-board, Remote Controller, NANLINK APP, Wire Controller, DMX/RDM, LumenRadio CRMX, Art-Net/sACN
8. Built-in 12 customisable practical effects



Includes

Evoked 2400B × 1, Yoke × 1, Power Supply × 1, DC Connection Cable 7.5M × 1, AC Power Cable (2.5M+1M) × 1, AS-CP-QR-EV Quick Release Clamp × 1, WS-RC-C2 Remote Controller × 1, USB Flash Drive × 1, User Manual × 1, CC-EV2400-FT-FO Flight Case × 1, RF-NLM-45-EV2400 Reflector 45° with Soft Bag × 1 (packed separately)

* 3.5M AC Cable with Edison Connector for 110V voltage countries, for switching the power from 1700W (15Amp) to 2200W (20Amp).



Evoked Technical Data

Model	Evoked 2400B
Rated Power	2400W
Input Voltage/Current	DC48V/26A × 2, AC100V-240V 50/60Hz 26A Max
CCT	2700K-6500K (G/M±80)
CRI / TLCI	Average 96 / Average 97
TM-30	Rf: Average 95 / Rg: Average 100
Dimming	0-100%, stepless 0.1% from 0-100%
IP Rating	IP55
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM, LumenRadio CRMX, Art-Net/sACN, Wire Controller (reserved)
Product Size	Light Fixture (without COB protective cap): 427.3 × 316.4 × 265.1mm / 16.8 × 12.5 × 10.4" Power Supply: 389.2 × 172.2 × 268.3mm / 15.3 × 6.8 × 10.6"
Product Weight	Light Fixture (without COB protective cap): 15kg / 33.1lb Power Supply: 11.58kg / 25.53lb


Illumination (lux / fc)

CCT	Distance	Light Only	With 45° Reflector
3200K	3M	8732 lux / 811 fc	36710 lux / 3410 fc
	5M	3478 lux / 323 fc	12270 lux / 1140 fc
	7M	1848 lux / 172 fc	6381 lux / 593 fc
	9M	1152 lux / 107 fc	3872 lux / 360 fc
5600K	3M	9584 lux / 890 fc	41910 lux / 3893 fc
	5M	3801 lux / 353 fc	14070 lux / 1307 fc
	7M	2028 lux / 188 fc	7254 lux / 674 fc
	9M	1266 lux / 118 fc	4401 lux / 409 fc

Evoked Accessories (Optional)



SB-NLM-100-S
Square Softbox 100cm



SB-NLM-150-O
Octagonal Softbox 150cm



SB-NLM-120-PR
Parabolic Softbox 120cm



SB-NLM-150-PR
Parabolic Softbox 150cm



LT-NLM-120
Lantern Softbox 120cm



RF-NLM-26
26° Reflector
(for Evoke 900C/1200/1200B)



RF-NLM-45
45° Reflector
(for Evoke 900C/1200/1200B)



RF-NLM-60
60° Reflector
(for Evoke 900C/1200/1200B)



RF-NLM-26/60-KIT
26° and 60° Reflector Kit
(for Evoke 900C/1200/1200B)



RF-NLM-45-EV2400
45° Reflector
(for Evoke 2400B)



CB-EV2400-AC-EDS
3.5M AC Cable with Edison Connector for
Evoke 2400B, for switching the power from
1700W (15Amp) to 2200W (20Amp) at 110V



CB-EV1200-10M/12M
Connection Cable 10M/12M
(for Evoke 900C/1200/1200B)



AS-NL-BMSB
NL-Bowens Mount Softbox Adapter
(for Evoke 900C/1200/1200B)



CC-EV1200-FT
Flight Case
(for Evoke 900C/1200/1200B)



CC-EV1200-FL-YK-FT
Flight Case with FL-35YK
(for Evoke 900C/1200/1200B)



CC-ST-EV1200
Trolley Case
(for Evoke 900C/1200/1200B)



CC-EV2400-FT-FO
Flight Case
(for Evoke 2400B)



CC-EV2400-FT
Flight Case with 45° Reflector
(for Evoke 2400B)



AS-PJA-NLM
NL Mount Projection Adapter
(for Evoke 900C/1200/1200B)

Designed and developed exclusively for Nanlux fixtures with NL mount, converting NL mount to third-party mount to make fixtures compatible with third-party projector mount.

Product Size: 212 × 177 × 106mm / 8.35 × 6.97 × 4.17"
Product Weight: 2.2kg / 4.85lb



Evoke Accessories (Optional for Evoke 900C/1200/1200B)



FL-35YK
Fresnel Lens

The specially designed fresnel with NL Mount, with a center-mounted yoke offers a more balanced orientation plus a non-rosette locking hinge allowing for a smooth tilt movement. Providing smooth focusing of the light's beam spread from 11°-45°.

Product Size: 526 × 506.5 × 463.4mm / 20.71 × 19.94 × 18.24"
Product Weight: 10.84kg / 23.9lb



YK-EV1200-PO/FL-35-PO
Pole-Operated Yoke/Pole Operated Fresnel Lens

Includes 3 drive knobs for focusing and pan/tilt adjustment. When connected with a separately purchased pole, adjustments can be made on the ground when the lights are rigged up high.

YK-EV1200-PO
Product Size: 853 × 527 × 251mm / 33.58 × 20.75 × 9.88"
Product Weight: 8.55kg / 18.85lb

FL-35-PO
Product Size: 848 × 544 × 337mm / 33.39 × 21.42 × 13.27"
Product Weight: 16.14kg / 35.58lb

Evoke Accessories (Optional for Evoke 900C/1200/1200B/2400B)



FL-28
Fresnel Lens

The compact and portable FL-28 Fresnel lens is designed for NL mount fixtures, after rigorous optical design, under the premise of maintaining high illumination output and good compatibility. With 17° to 43° adjustable range, and 60% less in size compared with the existing FL-35 Fresnel lens, it provides great convenience for mounting. (*The power output of Evoke 2400B will be reduced to about 50%.)

Product Size: 422.3 × 360.6 × 226.4mm / 16.63 × 14.20 × 8.91"

Product Weight: 5.69kg / 12.54lb



FR-JP-2/FR-JP-4
Two-light/Four-light Frame with Junior Pin

Two-light/Four-light frame allows for using two or four Evoke in a single frame. Built out of high intensity aluminum alloy and stainless steel, offering a stable structure, high load capacity and vibration resistance. Supports 360° panning with an adjusting handle.

FR-JP-2

Product Size: 759 × 102 × 231mm / 29.88 × 4.02 × 9.09"

Product Weight: 3.2kg / 7.05lb

FR-JP-4

Product Size: 1489 × 122 × 1751mm / 58.62 × 4.8 × 68.94"


Product Weight: 27.5kg / 60.63lb



Dyno Series LED RGBWW Soft Panel Light
Powerful Performance. Beautifully Soft


Dyno 650C / 1200C

1. High power LED soft panel lights with ultra wide illumination, fully tunable between 2700K-20000K
2. Fully dimmable from 0-100% in ultra-precise intervals of just 0.1% (between 1-100%)
3. Support both wired and wireless control via NANLINK APP, DMX/RDM, Remote Controller and LumenRadio CRMX
4. Built-in 15 customisable practical effects
5. Choice of color modes: HSI, RGBW, Gel and XY
6. Intuitive user interface, providing effortless control
7. Multiple optional modifiers and compatible with DoPchoice

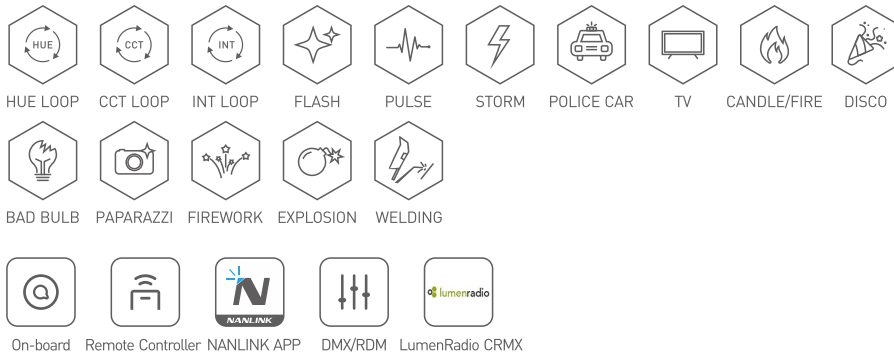


Includes

Dyno 650C/1200C x 1, Power Supply x 1, DC Connection Cable 5M x 1, AC Power Cable 3M x 1, Standard Diffuser x 1, AS-SCH-DN Dyno Super Clamp x 1, USB Flash Drive x 1, User Manual x 1, DMX Reference Guide x 1

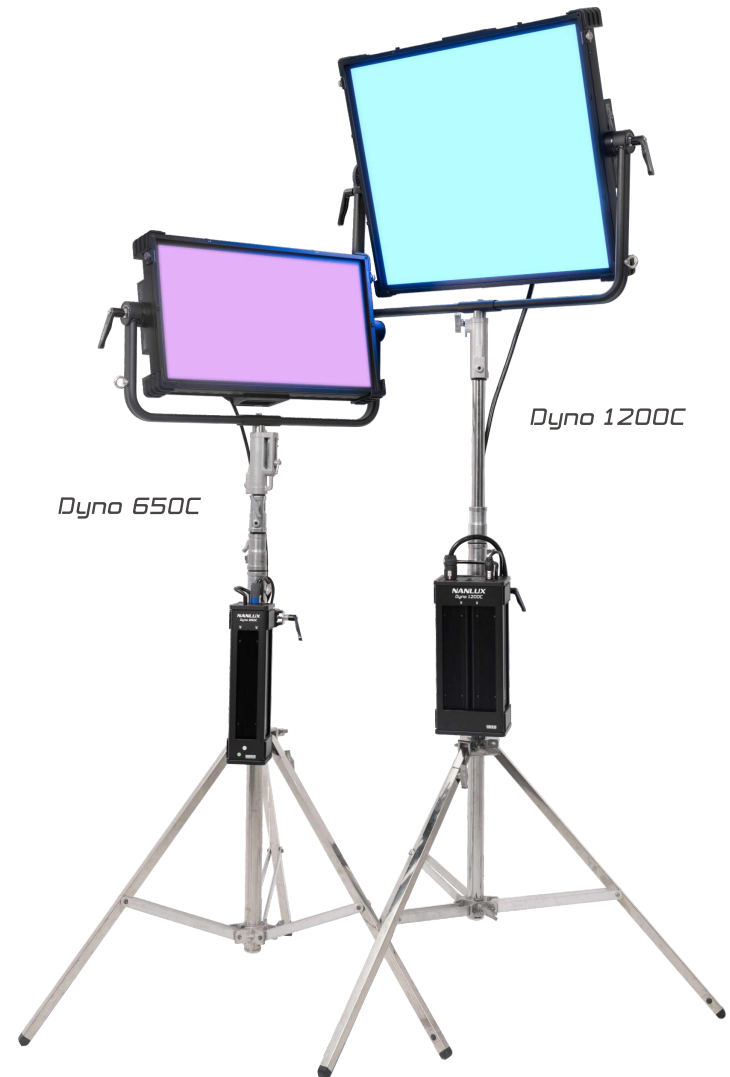



© The Creation Store

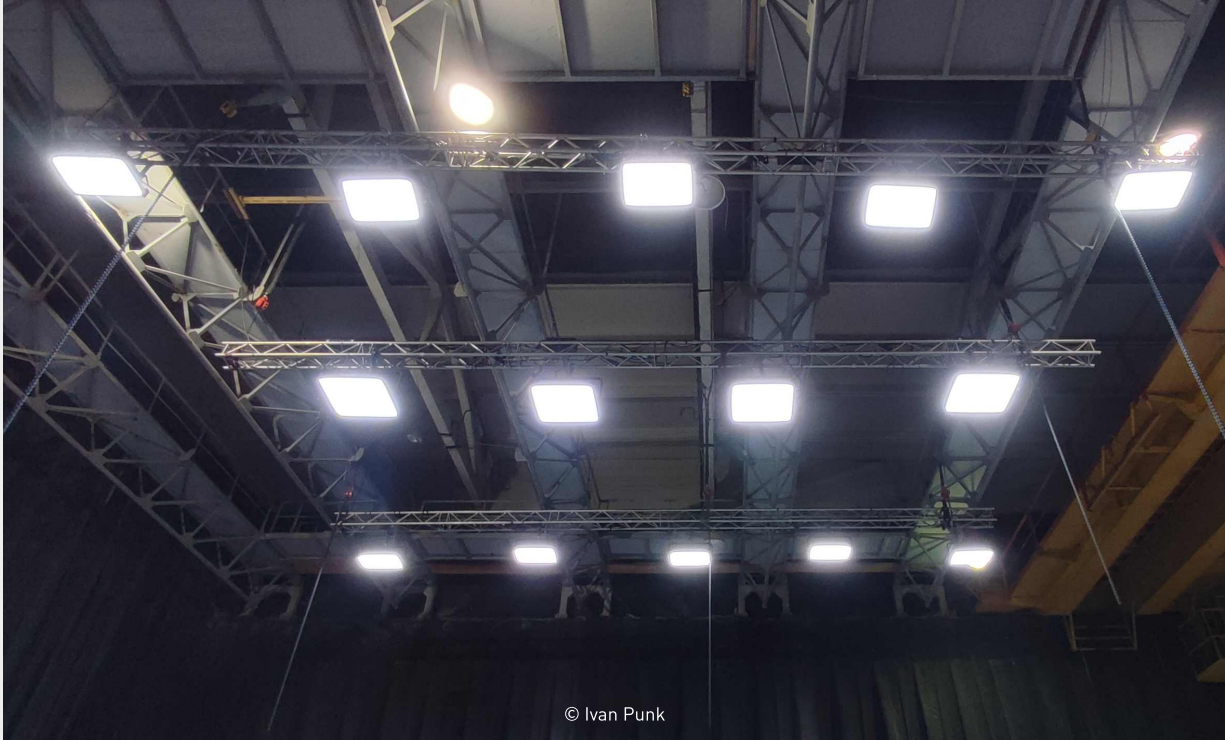

© Ivan Punk



© Luke Seerveld



© Pavel Trebukhin




© Pavel Khalitov

Dyno Accessories (Optional)



BD-DN650C
BD-DN1200C
Dyno 650C/1200C
Barndoor

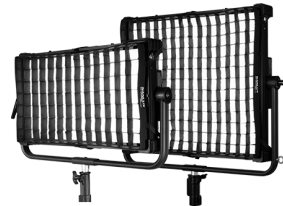


EC-DN650C
EC-DN1200C
Dyno 650C/1200C
Eggcrate 65°



SB-DN650C-RT+EC
SB-DN1200C-RT+EC
Dyno Rectangular Softbox
4ft and 4.5ft



SB-DN650C-O+EC
SB-DN1200C-O+EC
Dyno Octagonal Softbox
4ft and 5ft



DF-DN650C-ITSF
DF-DN1200C-ITSF
Diffusion Intensifier
for Dyno 650C/1200C



CC-FT-650C
CC-FT-1200C
Dyno 650C/1200C
Flight Case



SB-SL-DN650C
SB-SL-DN1200C
Dyno 650C/1200C
Space Light Softbox



AS-FC-DN650C
Dyno 650C Fixture Cover



AS-FC-DN1200C
Dyno 1200C Fixture Cover



CB-DN1200C-10M
Dyno 1200C
10M DC Connection Cable



CB-DN650C-AC-5M
Dyno 650C
5M AC Power Cable



CB-DN650C-10M
Dyno 650C
10M DC Connection Cable

Dyno *Technical Data*

Model	<i>Dyno 650C</i>	<i>Dyno 1200C</i>
Rated Power	650W	1200W
AC Amp Requirements	110V 6.36A, 220V 3.18A, 240V 2.91A	110V 12.72A, 220V 6.36A, 240V 5.83A
Input Voltage/Current	DC 48V/14.6A Max, AC 100-240V 50/60Hz	DC 48V/29.2A Max, AC 100-240V 50/60Hz
CRI / TLCI	Average 95	
CCT	2700K-20000K (G/M±100)	
Dimming	0-100%, stepless 0.1% from 1%-100%	
Control	On-board, Remote Controller, DMX/RDM, NANLINK APP, LumenRadio CRMX	
Product Size	Light Fixture: 857 × 173 × 630mm / 33.74 × 6.81 × 24.80" Power Supply: 134 × 104 × 460mm / 5.31 × 4.09 × 18.11"	Light Fixture: 1023 × 173 × 918mm / 40.28 × 6.81 × 36.14" Power Supply: 191 × 134 × 460mm / 7.52 × 5.28 × 18.11"
Product Weight	Light Fixture: 15.8kg / 34.8lb Power Supply: 4.2kg / 9.3lb	Light Fixture: 26.2kg / 57.8lb Power Supply: 7.5kg / 16.5lb

Illumination (lux / fc)









Model		<i>Dyno 650C</i>			<i>Dyno 1200C</i>		
Distance		3M	5M	7M	3M	5M	7M
CCT Boost Mode	3200K	2403 lux / 223 fc	979 lux / 91 fc	546 lux / 51 fc	5083 lux / 472 fc	2077 lux / 193 fc	1145 lux / 106 fc
	5600K	2649 lux / 246 fc	1082 lux / 101 fc	601 lux / 56 fc	5596 lux / 520 fc	2282 lux / 212 fc	1247 lux / 116 fc
CCT Standard Mode	3200K	2080 lux / 193 fc	850 lux / 79 fc	474 lux / 44 fc	4403 lux / 409 fc	1804 lux / 168 fc	975 lux / 91 fc
	5600K	2237 lux / 208 fc	919 lux / 85 fc	512 lux / 48 fc	4718 lux / 438 fc	1934 lux / 180 fc	1048 lux / 97 fc



NANLUX

TK Series LED Soft Panel Light

Ultra Soft, Ultra Slim

- 
CCT LOOP
(Bi-color)
- 
INT LOOP
- 
FLASH
- 
PULSE
- 
STORM
- 
TV
- 
CANDLE/FIRE
- 
BAD BULB

- 
PAPARAZZI
- 
FIREWORK
- 
EXPLOSION
- 
WELDING

- 
On-board
- 
Remote Controller
- 
NANLINK APP
- 
DMX/RDM
- 
LumenRadio CRMX





1. Ultra-efficient, bright, daylight illumination
2. Flicker free, fully dimmable between 0 and 100%
3. Built-in 11 customisable practical effects
4. Support both wired and wireless control via NANLINK APP, DMX/RDM, Remote Controller and LumenRadio CRMX

Includes

TK-200/450 × 1, Barndoor × 1, Power Adapter × 1, Power Cable × 1, Yoke × 1, User Manual × 1, DMX Reference Guide × 1, Connection Cable × 1 (TK-450)





1. Allow precision color temperature adjustment between 2700K and 7500K
2. Flicker free, fully dimmable between 0 and 100%
3. Built-in 12 customisable practical effects
4. Support both wired and wireless control via NANLINK APP, DMX/RDM, Remote Controller and LumenRadio CRMX
5. Can be powered either by AC adapter provided or an optional 14.8V/26V battery
6. Universal installation, available with a choice of yoke or central mount



Take TK-140B/280B Anywhere

Lightweight, portable and with a choice of power options, using either the AC adapter provided, or with an optional 14.8V/26V battery



AC Adapter (Included)



14.8V V-mount Battery (Optional)



26V V-mount Battery (Optional)

Includes

TK-140B/280B × 1, Barndoor × 1, Power Adapter × 1, AC Power Cable × 1, Yoke × 1, User Manual × 1, DMX Reference Guide × 1

TK Accessories (Optional)




YK-CM-BHG
Central Mount
(only available for
TK-140B/280B)



AS-FC-TK200/140B
AS-FC-TK450/280B
Fixture Cover



EC-TK140/280B/200/450
Eggcrate 65°



HC-TK140/280B/200/450
Honeycomb Grid 65°



CC-TK140/280B/200/450-2-FT
Flight Case for Dual
TK-140/280B/200/450

TK Technical Data


Model	TK-200				TK-450				TK-140B				TK-280B			
Rated Power	240W				455W				160W				280W			
Input Voltage/ Current	DC 24V/10.4A Max AC 100-240V 50-60Hz				DC 48V/10A Max AC 100-240V 50/60Hz				DC 24V/6.67A Max AC 100-240V 50/60Hz				DC 48V/5.84A Max AC 100-240V 50/60Hz			
CCT	5600K								2700K-7500K							
CRI / TLCI	96 / 98								Average 95 / Average 98							
Dimming	0-100%															
Control	On-board, Remote Controller, DMX/RDM, NANLINK APP, LumenRadio CRMX															
Product Size	Light Fixture (with yoke): 890 × 85 × 540mm / 35.04 × 3.4 × 21.3" Barndoor: 690 × 315 × 10mm / 27.2 × 12.40 × 0.39" Power Adapter: 185 × 110 × 50mm / 7.28 × 4.33 × 1.97"				Light Fixture (with yoke): 1340 × 85 × 540mm / 52.76 × 3.4 × 21.3" Barndoor: 1120 × 315 × 10mm / 44.09 × 12.40 × 0.39" Power Adapter: 313 × 250 × 43mm / 12.32 × 9.84 × 1.69"				Light Fixture (with yoke): 890 × 85 × 540mm / 35.04 × 3.4 × 21.3" Barndoor: 690 × 315 × 10mm / 27.2 × 12.40 × 0.39" Power Adapter: 180 × 75 × 40mm / 7.09 × 2.95 × 1.57				Light Fixture (with yoke): 1340 × 85 × 540mm / 52.76 × 3.35 × 21.26" Barndoor: 1120 × 315 × 10mm / 44.09 × 12.40 × 0.39" Power Adapter: 215 × 90 × 45mm / 8.46 × 3.54 × 1.77"			
Product Weight	Light Fixture: 5.68kg / 12.52lb Yoke: 1.38kg / 3.04lb Barndoor: 1.08kg / 2.38lb Power Adapter: 0.97kg / 2.14lb				Light Fixture: 8.58kg / 18.74lb Yoke: 1.68kg / 3.53lb Barndoor: 1.58kg / 3.48lb Power Adapter: 2.78kg / 6.13lb				Light Fixture: 6.06kg / 13.36lb Yoke: 1.38kg / 3.04lb Barndoor: 1.08kg / 2.38lb Power Adapter: 0.76kg / 1.68lb				Light Fixture: 10.5kg / 23.15lb Yoke: 1.68kg / 3.70lb Barndoor: 1.58kg / 3.48lb Power Adapter: 1.33kg / 2.93lb			
Illumination (lux / fc)																
Model	TK-200				TK-450				TK-140B				TK-280B			
Distance	1M	3M	5M	7M	1M	3M	5M	7M	1M	3M	5M	7M	1M	3M	5M	7M
3200K	/								3506 lux 326 fc	407 lux 38 fc	168 lux 16 fc	93 lux 9 fc	5572 lux 518 fc	809 lux 75 fc	333 lux 31 fc	185 lux 17 fc
5600K	6888 lux 640 fc	901 lux 84 fc	374 lux 35 fc	208 lux 19 fc	12480 lux 1159 fc	1776 lux 165 fc	736 lux 68 fc	405 lux 38 fc	3757 lux 349 fc	428 lux 40 fc	175 lux 16 fc	97 lux 9 fc	5900 lux 548 fc	860 lux 80 fc	353 lux 33 fc	195 lux 18 fc



© The Creation Store



© Ivan Punk

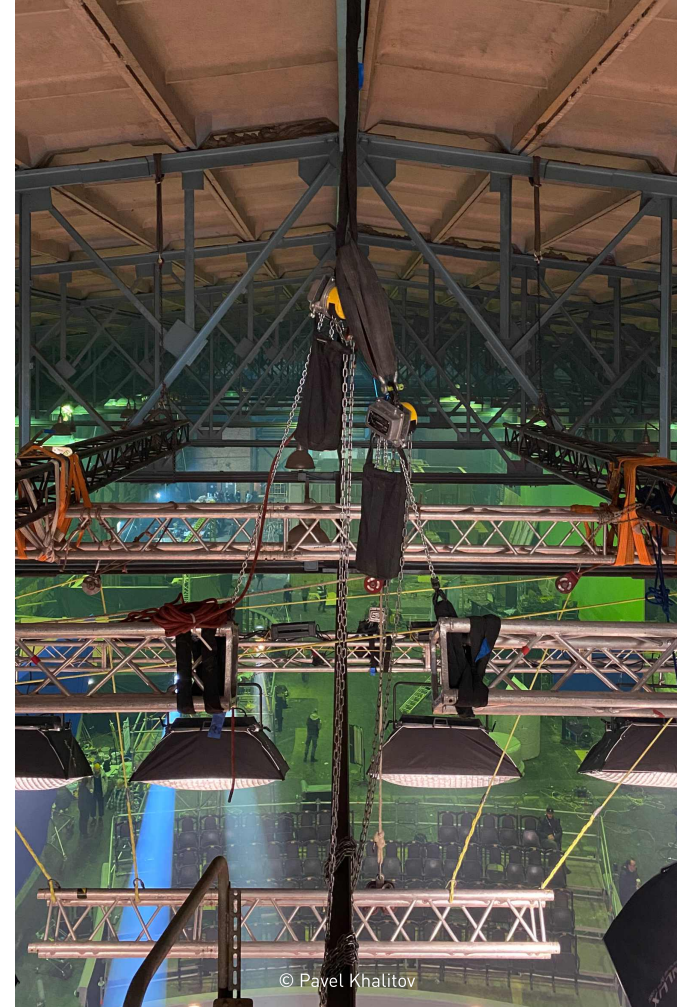

© Pavel Khalitov




© Djordje Stojilkovic



© La Planète Rouge



© Senju Yamashita

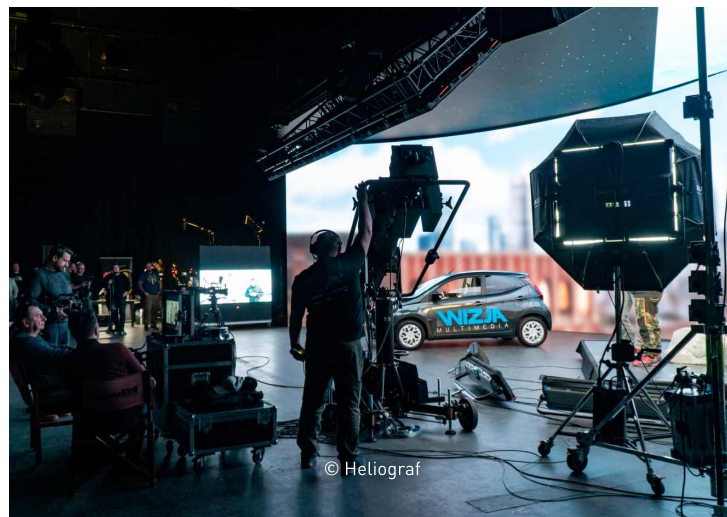

© Heliograf



© Version 2



© Alexander Stanishev



© Bruno Degraeve




© Djordje Stojiljkovic



© Rick Joaquim



© David Procter

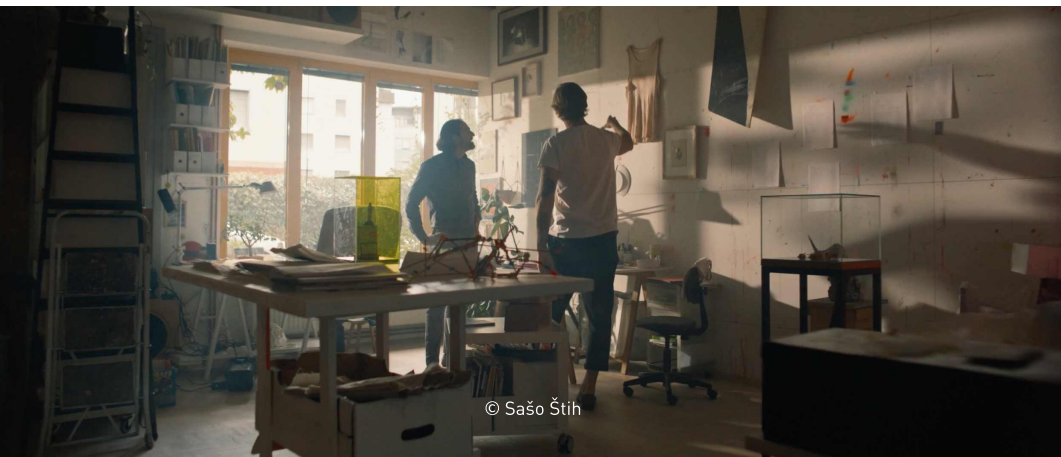

© Sašo Štih



© Sašo Štih

PHOTOQUIP[®] INDIA LTD.

Distributor :

Photoquip India Limited

10/116 Vidyalankar College Road, Antop Hill,
Wadala East, Mumbai - 400 037

Contact : 022-24110110

www.photoquip.com

 @photoquipindia  @nanlux_india

 Photoquip India Ltd

 info@photoquip.com



Photoquip